

FEATURES & BENEFITS

Quick Product Guide

- Robust packing follower

- Larger double packing box
- Available Fugitive Emissions Packing

- Anti-blowout stem

- Precise EDM machined splined shaft and ball

- 300 to 1 Turndown/Rangeability

- One-piece body

- Standard ISO shaft and mounting bracket

- Multiple actuation options

- Flanged bolted bonnet

- Self centering metal / soft seal

- ANSI Class IV or VI Shutoff


- CVD-5B Hardening available for abrasive service

- Double gasket sealing on seat retainer

- Robust single piece non-rotating post




SCAN CODE TO LEARN MORE!

OpVEE V-Notch Ball Control Valve Specifications	
Type	V-Notch Ball, Segmented Ball
Sizes (NPS)	1" to 24"
Body Styles	Fabricated (XT), Single Piece, Vacuum Jacketed, Steam Jacketed
Body Materials	Carbon Steel, Stainless Steel, Alloy, Chrome Moly
Pressure Classes (ASME/ANSI)	CL150, CL300, CL600
Shutoff Classes (ANSI)	Class IV, Class VI
End Connections	RF Integral Flange, Wafer/Flangeless
Service	General, Corrosive, Dirty
Operating Temperature	Standard, High
Flow Characteristics	Equal Percentage
Industries	Chemical/Petrochemical, Food & Beverage, Metals & Mining, Oil & Gas, Power, Pulp & Paper, Refining
Certifications/Norms	ANSI/ISA, ASME, NACE
Actuators	OpRPA Rack & Pinion, OpTK Rotary Piston, OpDGM/ASD Spring Diaphragm, and Others
Positioners	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>HPP5500™ Intrinsic Safe Digital Positioner</p> </div> <div style="text-align: center;">  <p>HPP4000™ Explosion Proof Digital Positioner</p> </div> </div>



Trimteck, LLC
Engineering & Manufacturing
12461 NW 44th Street
Coral Springs, Florida 33065 USA
+1-954-753-5545

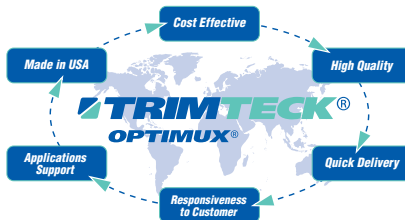

Products in compliance with:
ASME B16.34
ANSI/ISA-75.05.01-2019